

10-port sector antenna, 4x 694–960 and 6x 1695–2690 MHz, 65° HPBW, 5x RET

- All Internal RET actuators are connected in "Cascaded SRET" configuration
- Supports re-configurable antenna sharing capability enabling control of the internal RET system using up to two separate RET compatible OEM radios

General Specifications

Antenna Type Sector

Band Multiband

Color Light Gray (RAL 7035)

Grounding TypeRF connector inner conductor and body grounded to reflector and mounting

bracket

Performance Note Outdoor usage | Wind loading figures are validated by wind tunnel

measurements described in white paper WP-112534-EN

Radome Material Fiberglass, UV resistant

Reflector Material Aluminum

RF Connector Interface 4.3-10 Female

RF Connector LocationBottom

RF Connector Quantity, high band 0

RF Connector Quantity, mid band 6

RF Connector Quantity, low band 4

RF Connector Quantity, total 10

Remote Electrical Tilt (RET) Information

RET Hardware CommRET v2

RET Interface 8-pin DIN Female | 8-pin DIN Male

RET Interface, quantity 2 female | 2 male

Input Voltage 10-30 Vdc

Internal RET Low band (2) | Mid band (3)

Power Consumption, active state, maximum $8~\mathrm{W}$ Power Consumption, idle state, maximum $1~\mathrm{W}$

Protocol 3GPP/AISG 2.0 (Single RET)

COMMSCOPE®

Dimensions


Width 498 mm | 19.606 in

Depth 197 mm | 7.756 in

Length 2688 mm | 105.827 in

Net Weight, antenna only 43.2 kg | 95.24 lb


Array Layout



Array	Freq (MHz)	Conns	RET (SRET)	AISG RET UID
R1	694-960	1-2	1	CPxxxxxxxxxxxxxR1
R2	694-960	3-4	2	CPxxxxxxxxxxxxxR2
Y1	1695-2690	5-6	3	CPxxxxxxxxxxxxxY1
Y2	1695-2690	7-8	4	CPxxxxxxxxxxxxxY2
Y3	1695-2690	9-10	5	CPxxxxxxxxxxxxxY3

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration

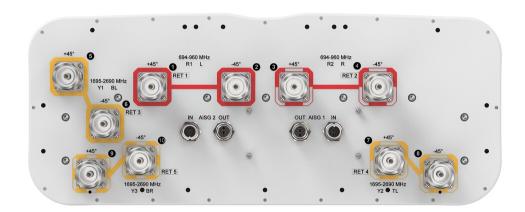

Electrical Specifications

Impedance 50 ohm

Operating Frequency Band 1695 – 2690 MHz | 694 – 960 MHz

Polarization ±45°

Electrical Specifications

·								
Frequency Band, MHz	694-790	790-890	880-960	1695-1880	0 1850-199	0 1920-218	0 2300-2500	2500-2690
Gain, dBi	15.8	16.4	16.8	17	17.6	17.8	18.3	17.8
Beamwidth, Horizontal, degrees	70	67	62	59	60	61	61	69
Beamwidth, Vertical, degrees	8.1	7.4	6.8	7.5	7	6.6	5.7	5.3
Beam Tilt, degrees	2-12	2-12	2-12	2-12	2-12	2-12	2-12	2-12
USLS (First Lobe), dB	12	16	17	20	20	20	18	16
Front-to-Back Ratio at 180°, dB	32	32	33	37	38	36	34	33
Isolation, Cross Polarization, dB	28	28	28	28	28	28	28	28
Isolation, Inter-band, dB	30	30	30	30	30	30	30	30

Page 3 of 4



VSWR Return loss, dB	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150	-150	-150
Input Power per Port at 50°C, maximum, watts	300	300	300	250	250	250	200	200

Mechanical Specifications

 Wind Loading @ Velocity, frontal
 1,070.0 N @ 150 km/h (240.5 lbf @ 150 km/h)

 Wind Loading @ Velocity, lateral
 375.0 N @ 150 km/h (84.3 lbf @ 150 km/h)

 Wind Loading @ Velocity, maximum
 1,385.0 N @ 150 km/h (311.4 lbf @ 150 km/h)

 Wind Loading @ Velocity, rear
 880.0 N @ 150 km/h (197.8 lbf @ 150 km/h)

Wind Speed, maximum 241 km/h (150 mph)

Packaging and Weights

 Width, packed
 565 mm | 22.244 in

 Depth, packed
 368 mm | 14.488 in

 Length, packed
 2874 mm | 113.15 in

 Weight, gross
 64.7 kg | 142.639 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



Included Products

BSAMNT-4 — Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members.

Kit contains one scissor top bracket set and one bottom bracket set.

BSAMNT-M4 – Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round

members. Kit contains one scissor bracket set.

* Footnotes

Performance Note Severe environmental conditions may degrade optimum performance

COMMSCOPE®